



**MODEL SMT150-200LED**

(Fan/LED Light - 150 /200 CFM)

	<b>6" Duct (Standard):</b>			
	150 CFM/0.6 Sones @0.1" SP, 15.0 Watts	200 CFM/1.0 Sone @0.1" SP, 25.0 Watts		
	150 CFM/1.3 Sones @0.25" SP, 23.0 Watts	200 CFM/1.5 Sones @0.25" SP, 37.0 Watts		

**Description**

Low noise ceiling mount ventilating fan/Dimmable LED light rated for continuous running. Fan has been ENERGY STAR qualified, HVI, UL and cUL certified, and can be used to comply with ASHRAE 62.2 (local and whole building continuous and intermittent operation).

**DC Motor/Blower**

- Power rating of 120 volts/60Hz
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers OFF when impeller is locked abnormally

**Housing**

- Galvanized steel body
- Detachable 6" diameter metal duct adapter
- Built-in backdraft damper
- Hanger bars included
- Easy installation

**Grille**

- Attractive design using ABS material
- Attaches directly to housing with torsion springs

**Light**


- 13-Watt LED light included (equivalent to a 60-Watt incandescent bulb)
- Light output 850 Lumens, 90CRI
- Adjustable color temperature 3000K, 4000K, 5000K
- Dimmable LED Light (dimmer switch not included)

**Warranty**

- 3-Year limited warranty


**TYPICAL SPECIFICATION**

Ventilation fan shall be Delta Breez model SMT150-200LED; ENERGY STAR qualified with Brushless DC Motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 200 CFM and loudness rating of 1.0 Sone at 0.1" static pressure as certified by the Home Ventilating Institute (HVI); power consumption of not more than 25 Watts with efficiency rating of not more than 8.0 CFM/Watt at 0.1" static pressure; fan will feature motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL/cUL listed for tub/shower enclosure when use with GFCI-protected branch circuit wiring.

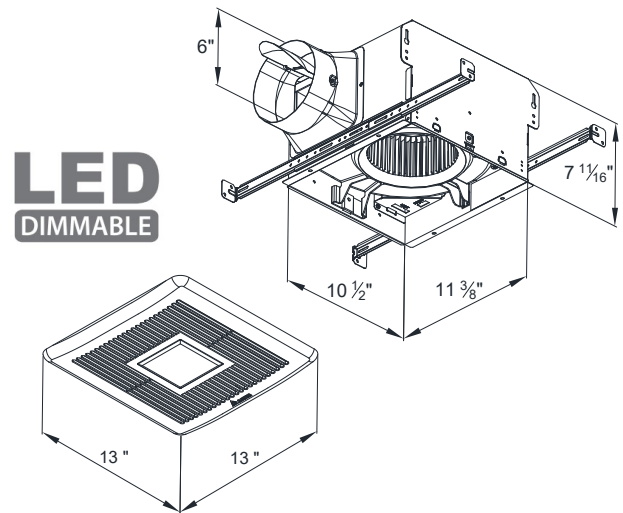

**LED DIMMABLE**

<b>BreezSmart SMT150-200LED</b>	<b>6" Duct (Standard)</b>			
Static Pressure (inches w.g.)	0.1	0.25	0.1	0.25
Air Flow (CFM)	150	150	200	200
Sones	0.6	1.3	1.0	1.5
Power Consumption (Watts)	15.0	23.0	25.0	37.0
Energy Efficiency (CFM/Watt)	10.0	6.5	8.0	5.4
Current (Amps)	0.78 Max.			
Power Rating (V/Hz)	120 / 60			
LED Light (Watt)	13			

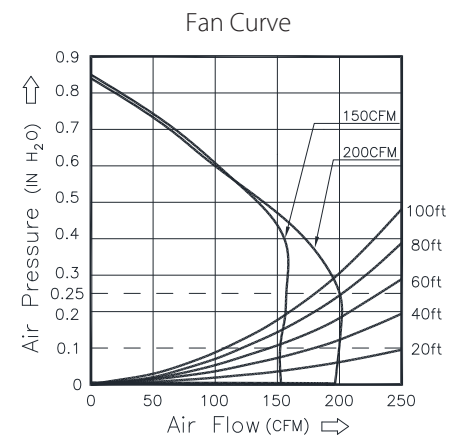

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: